

1. GENERAL INFORMATION

1.1 Customer Information

Contact Name

Date (MM/DD/YY)

Phone

Email

1.2 Project

Quote Reference #

Job Name

Location

Installed By

Standard Features

36x54, extruded aluminum cabin 84", 800 lbs, 2 stops - 2 call stations - handrail - fixed ramp - car gate(s) (Polycarbonate goodgate) - upper landing polycarbonate gate - Galvanized steel rails - safety underpan - supporting bracket - door interlocks.

Cabin:

☐ Full Cab 84"

Configuration:

☐ 0 degree (inline)
☐ 180 degree (straight through)


Polycarbonate Type:

☐ Clear (standard)

Dimension:

☐ 36 x 54

Rail Location



*When facing cab at bottom landing


Keyed Call Send Controls

Flush Call Post Surface Mount In Gate's Frame



☐ Top
☐ Bottom ☐ Top
☐ Bottom ☐ Top Gate

Rail Supports:



☐ Triangle Bracket

*Fix into the upper landing

One triangle bracket included,
but option to add a second one is available



☐ "L" Bracket

COASTAL OUTDOOR ELEVATOR

ORDER FORM

CHECK THE LOCATION OF YOUR LANDINGS

Level 1 ☐ ☐

Level 2 ☐ ☐


Installation Type

☐ Fixed Ramp

☐ Pit

Right

Left

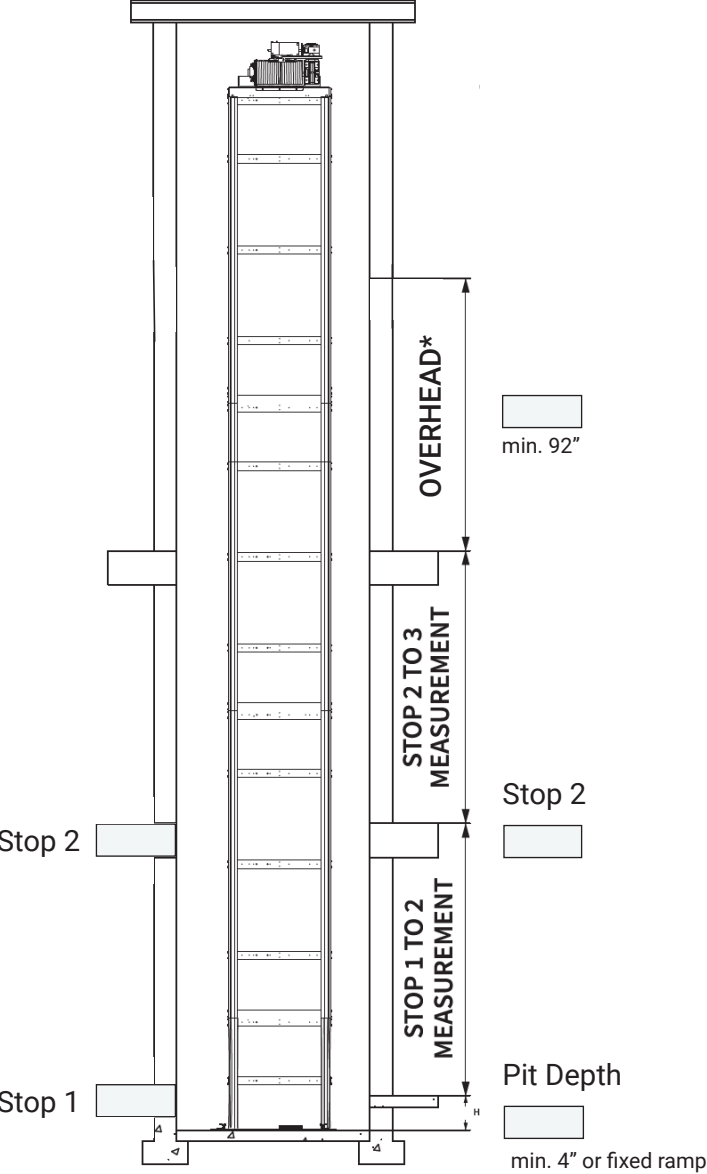

FOR STOPS BELOW:

Choose landing doors for each stop (optional). Sliding doors on the cabin and the upper landing gate are included with the standard kit.

Stop 1

☐ Polycarbonate Door

☐ Exterior Door

☐ Right  ☐ Left 

Stop 2

☐ Polycarbonate Gate 42"

☐ Polycarbonate Door

☐ Exterior Door

☐ Right  ☐ Left 

NOTE: Make sure to attach photos of job site to order form.

*OVERHEAD - the distance from the finished floor to the top of the hoistway on the top landing